



 **nextalite**®

Winter garden and pergola lighting

Winter garden lighting and Smart Wireless control

Complete range of lighting solutions for winter garden and pergola system.
Recessed spot lights, flexible LED strips, wall lights and control by wireless technologies RF and Smart WiFi, with cutting edge remote controls, sensors and Smartphone App for managing the system from wherever you are.

 nextalite®

Powered by






WIRELESS TECHNOLOGY
LIGHTING **AUTOMATION**
MADE IN ITALY

1. Recessed spot lights for aluminum profiles

2. Flexible LED strips for linear lighting

3. Wall lighting

4. Control system and power supply

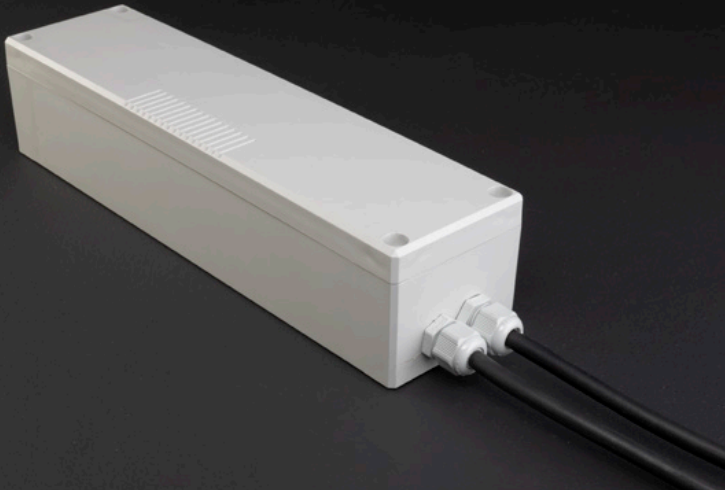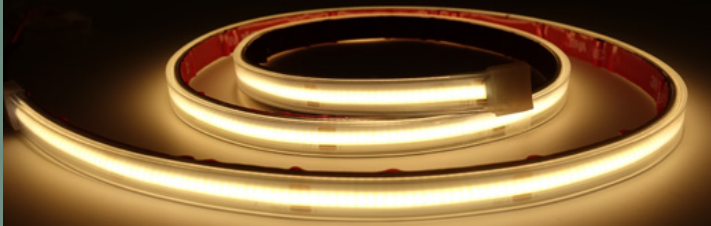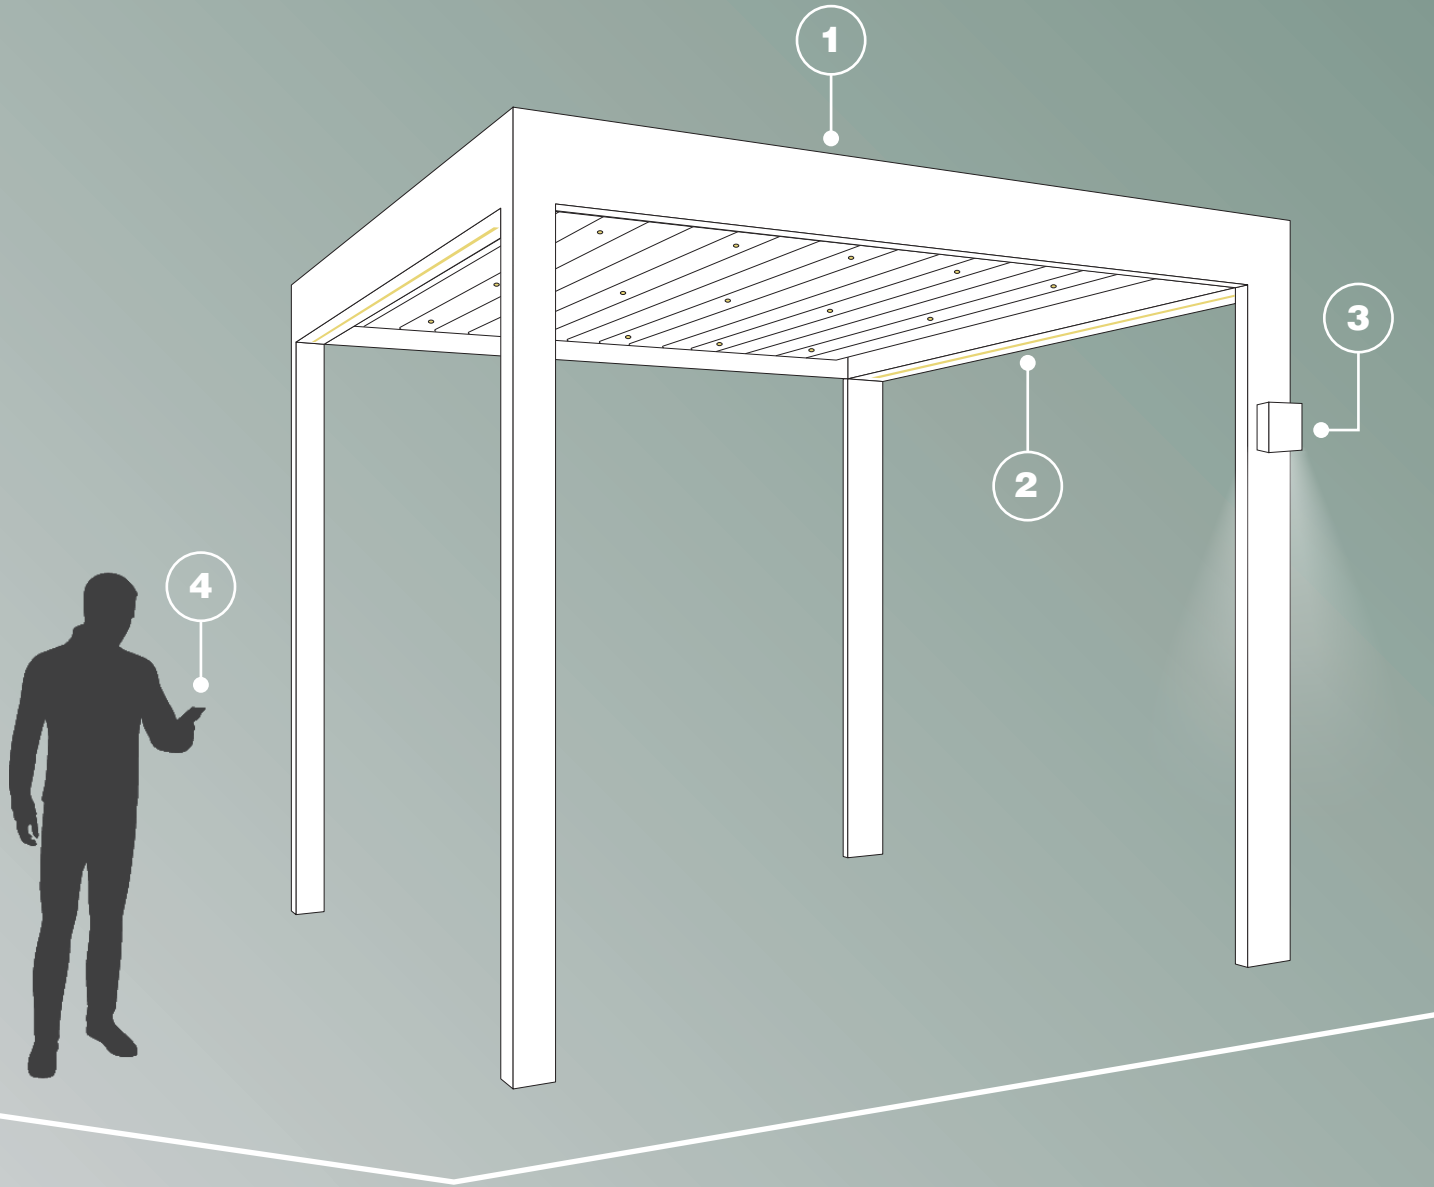



Spot LED



Strip LED




Linear LED lights

Lumi G6040




Code	Lumi-G6040
Power supply	24 Vdc
Power	4W
Light temperature	3000 K
Lumen	300
IP level protection	IP 65
Hole size	50 mm
Cable output	Easy-Plug connector
Fixing system	Rotating springs



Lumi G4010




Code	Lumi-G4010
Power supply	24 Vdc
Power	1W
Light temperature	3000 K
Lumen	120
IP level protection	IP 65
Hole size	30 mm
Cable output	Easy-Plug
Fixing system	Rotating or side springs



Lumi G4030




Code	Lumi-G4030
Power supply	24 Vdc
Power	3W
Light temperature	3000 K
Lumen	250
IP level protection	IP 65
Hole size	30 mm
Cable output	Easy-Plug
Fixing system	Rotating or side springs

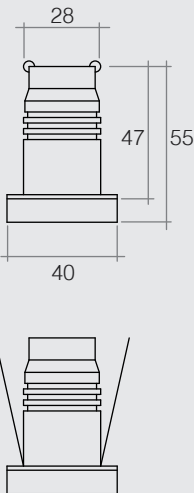

Lumi T300




Code	Lumi-T300
Power supply	24 Vdc
Power	1,5 W
Light temperature	3000 K
Lumen	145
IP level protection	IP 65
Hole size	25 mm
Color	Silver Gray
Cable output	Easy-Plug connector
Fixing system	Side springs



Lumi S450




Code	Lumi-S450/BL
Power supply	24 Vdc
Power	4,5 W
Light temperature	3000 K
Lumen	440
IP level protection	IP 65
Hole size	D 30 mm
Color	Black
Cable output	Easy-Plug connector
Fixing system	Rotating springs



Lumi S350M




Code	Lumi-S350M
Power supply	24 Vdc
Power	3,5 W
Light temperature	3000 K
Lumen	330
IP level protection	IP 65
Hole size	D 30 mm
Color	Customizable
Cable output	Easy-Plug connector
Fixing system	Rotating springs



Ring nut supplied in anodized aluminum to allow color customization. Painting on request.


Flexible COB LED

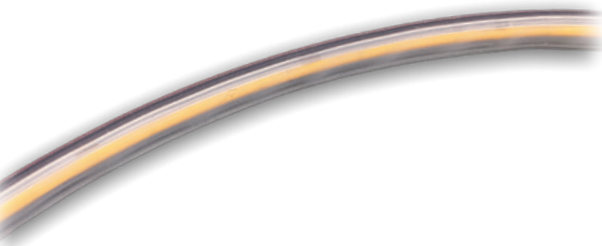


Code	Star-C	
Power supply	24 Vdc	
Power	10W/m	
Light temperature	3000-4000 K	
Lumen	1000 lm/m	
LED/m	COB	
IP level protection	IP 65	
Step cutting	50 mm	
Cable	Easy-Plug connector	
Dimensions	10mm x 8mm x L	L customizable




Flexible LED

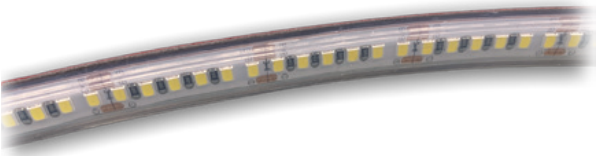

Code	Star-L	
Power supply	24 Vdc	
Power	18W/m	
Light temperature	3000-4000 K	
Lumen	1200 lm/m	
LED/m	180	
IP level protection	IP 65	
Step cutting	35 mm	
Cable	Easy-Plug connector	
Dimensions	12mm x 8mm x L	L customizable

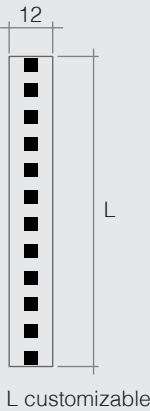



Flexible RGB LED

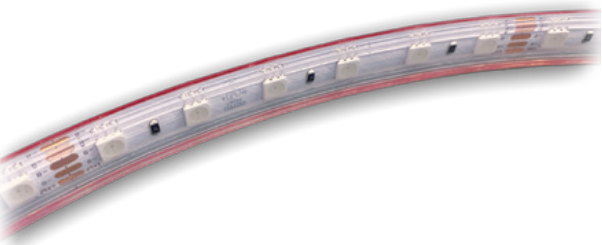


Code	Star-RGB	
Power supply	24 Vdc	
Power	14W/m	
LED type	RGB	
Lumen	800 lm/m	
LED/m	60	
IP level protection	IP 65	
Step cutting	100 mm	
Cable	Cavo 4x0,35	
Dimensions	10mm x 8mm x L	L personalizzabile



Aluminum profiles

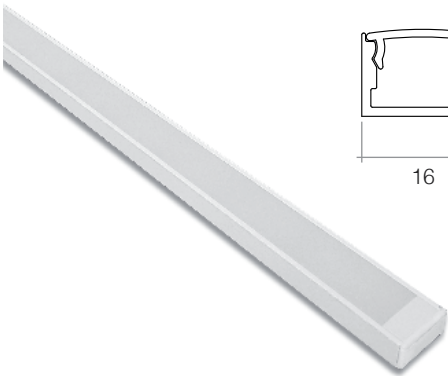

OVER-20
Aluminum profile available in black or white color and max lenght 6 meters




OVER-250
Aluminum profile available in black or white color and max lenght 6 meters


Easy-Plug cabling system




EP-1000/MF EP-2000/MF EP-3000/MF
Cable lenght 1000, 2000 or 3000 mm with Easy-Plug connector male-female




EP-150/M2F
3-way cabling, lenght 150 mm with 1 Easy-Plug male connector and 2 female connctors

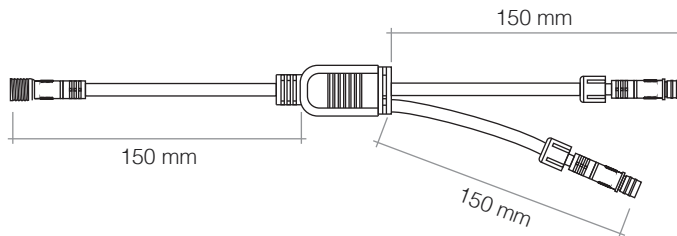

EP-150/F
Cable lenght 150 mm with 1 Easy-Plug female connctor






EP-150/M
Cable lenght 150 mm with 1 Easy-Plug male connector



Wall light with adjustable emission angle






Code	Cubo-G	Cubo-W
Power supply	220-240 Vac	220-240 Vac
Power	2 x 6 W	2 x 6 W
Light temperature	3000 K	3000 K
IP level protection	IP 54	IP 54
Dimensions	108x108x108mm	108x108x108mm
Color	Dark gray	White



Wall light 1 beam





Code	Wall-100
Power supply	220-240 Vac
Power	5 W
Light temperature	3000 K
IP level protection	IP 44
Dimensions	68 x 81 x 91 mm



Wall light 2 beams



Code	Wall-200
Power supply	220-240 Vac
Power	2 x 5 W
Light temperature	3000 K
IP level protection	IP 44
Dimensions	68 x 81 x 150 mm



IP67 Power supply units for 24Vdc LEDs



PS-XLG100

Power supply 230V-24Vdc, 100W.
IP level protection IP67.

PS-XLG150

Power supply 230V-24Vdc, 150W.
IP level protection IP67.

PS-XLG200

Power supply 230V-24Vdc, 200W.
IP level protection IP67.

Power supply units with IP55 plastic box



LB-50/PS

Power supply 230V-24Vdc, 50W.
IP level protection IP55.

LB-100/PS

Power supply 230V-24Vdc, 100W.
IP level protection IP55.

LB-150/PS

Power supply 230V-24Vdc, 150W.
IP level protection IP55.

LB-200/PS

Power supply 230V-24Vdc, 200W.
IP level protection IP55.

Electronic control units




LEDBOX

Multi-outputs control units for 24Vdc single color, tunable white and RGB-RGBW LEDs.
Wired, RF Wireless and Smart control.
Integrated power supply.



REMOTE CONTROLS

Wide range of portable or wall remote controls for lighting management.



SMART CONTROL

Remote control from wherever you are with Smartphone and WiFi connection.



Company brand of Team srl
via G.Oberdan 90, 33074 Fontanafredda (pn) - Italy
ph. +39 0434 998682 - email: info@nexta-tech.com
web: www.nextalite.com / www.nexta-tech.com